
## **Reinforced Concrete Pipe**

Tongue and Groove 30" - 48"



DIMENSIONS									
'A' INSIDE DIAMETER	ASTM WALL	'B' WALL THICKNESS	'C' OUTSIDE DIAMETER	'D' AVAILABLE LENGTHS	'E'	'F'	'G'	'H'	,,,
30"	В	3.50"	37.00"	8.00'	33/4"	11/8"	1½"	31/4"	23/8"
36"	В	4.00"	44.00"	8.00'	33/4"	1¾"	21/8"	35%"	23/8"
42"	В	4.50"	51.00"	8.00'	41/4"	13/4"	21/8"	41/8"	2%"
48"	В	5.00"	58.00"	8.00'	43/16"	1%"	2%"	4½"	2¾"

- Reinforced concrete pipe to be manufactured to meet the following specs:
  - ASTM C76
  - AASHTO M170
  - NCDOT / SCDOT
- Mortar or flexible plastic type joint to meet fed spec SS-S-210A and ASSHTO M-198B
- Reinforced in accordance with applicable standard by wall (B) and Class (III, IV, and V)

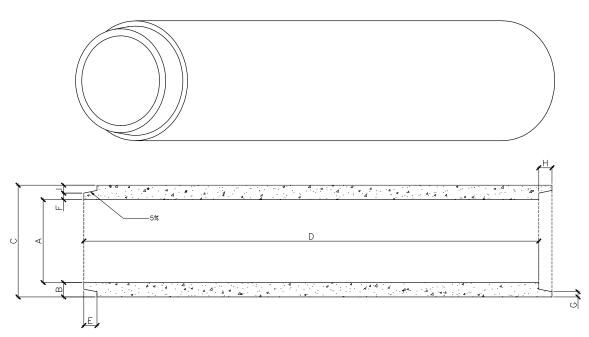

Large enough to deliver. Small enough to care. Since 1947.

JohnsonProductsUSA.com

Corporate Headquarters
Pipe & Drainage Structures
217 Klumac Road
Salisbury, NC 28144
704.636.5231

 Raleigh Area Showroon Masonry & Hardscapes 1401 Hwy 42 Willow Spring, NC 27592 919.552.0233

Triad Area Showroom
Architectural Masonry & Hardscapes
514 Burgin Drive
Lexington, NC 27292
336.248.2918

Charlotte Area Showroom Masonry & Hardscapes 106 Old Davidson Place NW Concord, NC 28027 704.786.4204

